
# Oasis 3-Piece, 60-inch, Center Drain Shower Compartment With ActivLife (HUD/FHA Fair Housing Act Design Manual) Reinforcement Package



**Specification** – Oasis 3-piece FRP gelcoat shower compartment SH3P-6030 center drain shower with L or R control wall, offered in a standard 4-inch or 6-inch (ABF) dam configuration. ActivLife package includes factory-applied reinforcement, in compliance with HUD/FHA Fair Housing Act Design Manual, for horizontal bar application on back wall and both side walls.

#### Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

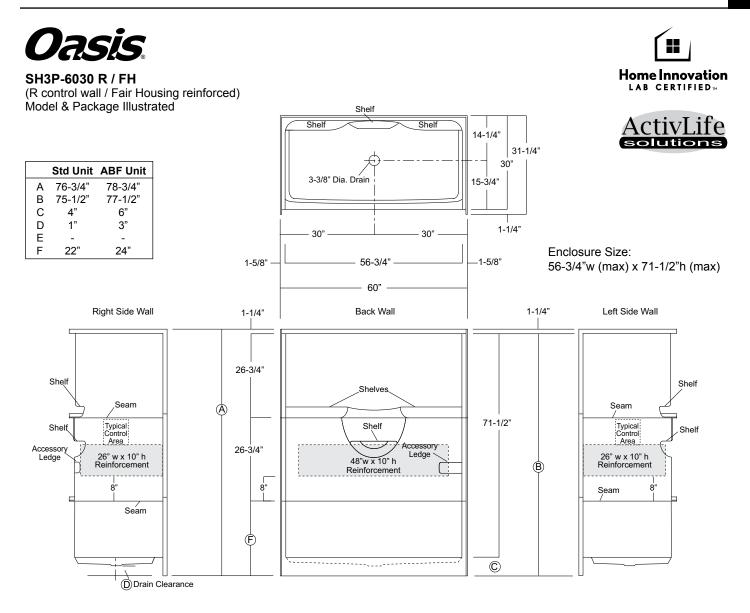

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / - 1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation

# Model ID

## Package Code

## Description (define configuration referencing control wall)

SH3P-6030 L (L control wall) / FH SH3P-6030 R (R control wall) / FH 60" x 30", 3-piece, center drain shower with L or R control wall, 4" (std) or 6" (ABF) dam and ActivLife back wall and side wall reinforcement for horizontal bar application.

Available Factory Installed Packages (model available without any component or reinforcement packages)

#### Component Packages: 1 TLV package code:

- 2-wall, 3-bar package with phenolic folding RH or LH seat
- 3. BP2 package code:
- 4. BP1 package code:

2. TL package code:

- 2-wall, 2-bar package with phenolic folding RH or LH seat
- 2-wall, 3-bar package 2-wall, 2-bar package

#### Reinforced ONLY Packages:

- 5. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing
- 6. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)

