Oasis WX Configured, Ramped Threshold, Roll-In Shower Compartment With ActivLife 3-Wall Mid-Level Reinforcement Wrap Package

Specification – Oasis one-piece FRP gelcoat shower compartment SHFW-WX-6235, having a 60 x 30-inch minimum clear interior dimension and ½-inch high maximum finished threshold with floor attachment flange on lower threshold, and expanded shower entry profile to minimize transfer space. ActivLife package includes factory applied, 3-wall, mid-level wrap reinforcement, exceeding (HUD/FHA) 'Fair Housing' requirements.

Standards Certification:
The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.
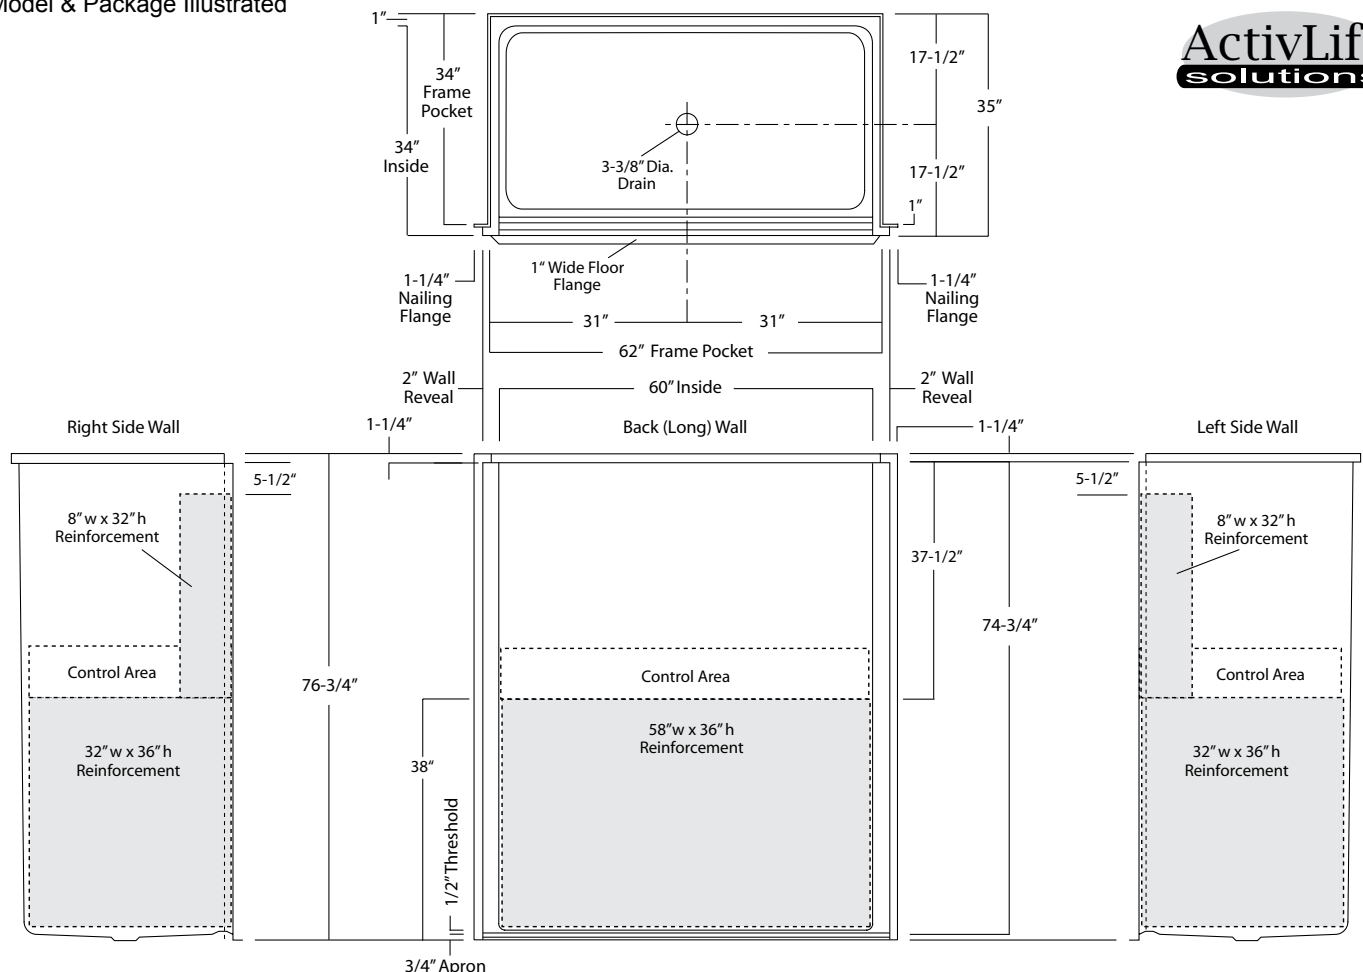
Oasis

SHFW-WX-6235 / 3SM
(mid-level reinforcement wrap)
Model & Package Illustrated

NOTE: ADA & ANSI regulations limit the use of reinforced only packages to certain non-public use applications (see ADA & ANSI standards for restrictions).

Home Innovation
LAB CERTIFIED™

ActivLife solutions

1″
34″ Frame Pocket
34″ Inside
17-1/2″
35″
17-1/2″
1″
3-3/8″ Dia. Drain
1″ Wide Floor Flange
1-1/4″ Nailing Flange
1-1/4″ Nailing Flange
31″
31″
62″ Frame Pocket
2″ Wall Reveal
60″ Inside
2″ Wall Reveal

Right Side Wall
1-1/4″
Back (Long) Wall
1-1/4″
Left Side Wall

5-1/2″
5-1/2″
8″ w x 32″ h Reinforcement
37-1/2″
8″ w x 32″ h Reinforcement
74-3/4″
Control Area
Control Area
Control Area
76-3/4″
58″ w x 36″ h Reinforcement
32″ w x 36″ h Reinforcement
38″
32″ w x 36″ h Reinforcement
1/2″ Threshold
3/4″ Apron

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch).
Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description
SHFW-WX-6235	/ 3SM	*60" x 30" minimum interior, center drain, wall face expanded, ramped 1/2-inch threshold shower with an ActivLife 3-wall mid-level reinforcement wrap package.*

Package Notes:

1. Model available without listed package.
2. Model available with a full reinforcement wrap (with or without package components), see ActivLife "3SF" package code.
3. For REINFORCEMENT ONLY replicating "TL" package with RH or LH seat reinforcement, see ActivLife "TLRF-RS" or "TLRF-LS" package code.
4. For REINFORCEMENT ONLY replicating "TL" package with dual seat reinforcement, see ActivLife "TLRF-DS" package code.
5. For REINFORCEMENT ONLY for horizontal bars (HUD/FHA-Fair Housing), see ActivLife "FH" package code.
6. For 2-bar and seat package, see "ADA/TL" package code.
7. For 2-bar package without seat, see ActivLife "2BAR" package code.
8. For 3-wall horizontal bars only package, see "ADA-RI" package code.

1.25" (1-1/4 inch) Ramped Threshold Profile

1.00" Floor Flange
3.00" Ramped Threshold
1.00"   1.25"   0.75"
Minimal Slope To Drain Outlet
0.50" Interior Dam
1.25" Exterior
0.50"
0.625"
Threshold Profile
0.125" Floor Flange

WX Vertical Wall Reveal Profile

Vertical Attachment Flange
0.125" - 0.1875" (+/-) Flange Thickness
Right Side Interior Shower Wall
1.25" (+/-) Flange
1.00" (+/-) Flange Recess
1.75" (+/-) Wall Face
0.25" (+/-) Offset Return