

Oasis 48-inch Shower Compartment With ActivLife (HUD/FHA Fair Housing Act Design Manual) Reinforcement Package



Specification – Oasis one-piece FRP gelcoat shower compartment SH-4836, offered in a standard 4-inch or 6-inch (ABF) dam configuration. ActivLife package includes a factory-applied reinforcement only package, in compliance with HUD/FHA Fair Housing Act Design Manual, shall include back wall and both side wall reinforcement, for horizontal bar application.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

Oasis®


SH-4836 / FH
(Fair Housing reinforced)
Model & Package Illustrated

	Std Unit	ABF Unit
A	76-3/4"	78-3/4"
B	75-1/2"	77-1/2"
C	4"	6"
D	1"	3"
E	-	-
F	-	-



Home Innovation
LAB CERTIFIED™

ActivLife
solutions

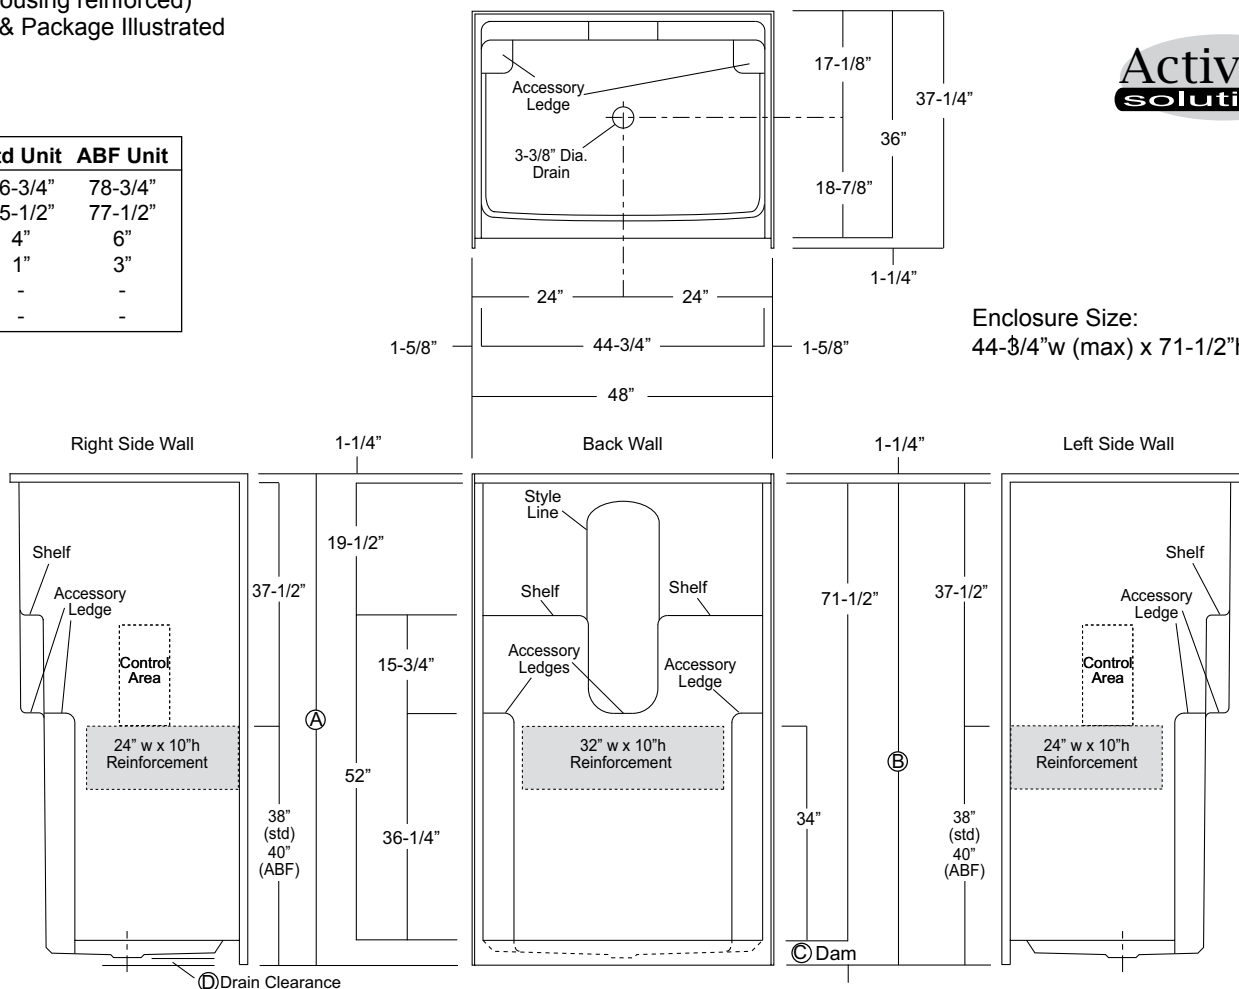


Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / - 1/8 inch).
Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description
----------	--------------	-------------

SH-4836 (Std or ABF)

/ FH

48" x 36", center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 3-wall horizontal bar reinforcement only package

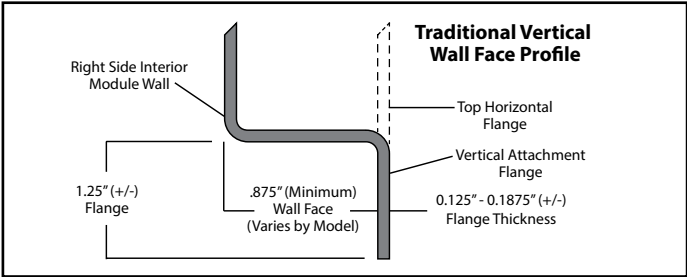

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

- | | |
|----------------------|---|
| 1. TLV package code: | 2-wall, 3-bar package with phenolic folding RH or LH seat |
| 2. TL package code: | 2-wall, 2-bar package with phenolic folding RH or LH seat |
| 3. BP2 package code: | 2-wall, 3-bar package |
| 4. BP1 package code: | 2-wall, 2-bar package |
| 5. BP3 package code: | 3-wall, 3-bar package |
| 6. BP5 package code: | 1-wall, 1-bar package |

Reinforced ONLY Packages:

- | | |
|-----------------------------|---|
| 7. FH package code: | reinforcement for horizontal bars, based on HUD/FHA-Fair Housing |
| 8. 3SM & 3SF package codes: | expanded reinforcement packages, (with or without package components) |