Oasis 60 x 32 Bathtub With ActivLife 3-Wall Mid-Level Reinforcement Wrap Package



Specification – Oasis one-piece, 60 x 32-inch deep, FRP gelcoat bathtub model TS-6032, offered in a standard 16-inch or 17.25-inch (ABF) apron height. ActivLife package includes factory applied, 3-wall, mid-level reinforcement, exceeding (HUD/FHA) 'Fair Housing' requirements.

Standards Certification:

The bathtub listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.




TS-6032 R / 3SM

(RH drain / mid-level reinforcement wrap) Model & Package Illustrated

NOTE: ADA & ANSI regulations limit the use of reinforced only packages to certain non-public use applications (see ADA & ANSI standards for restrictions).




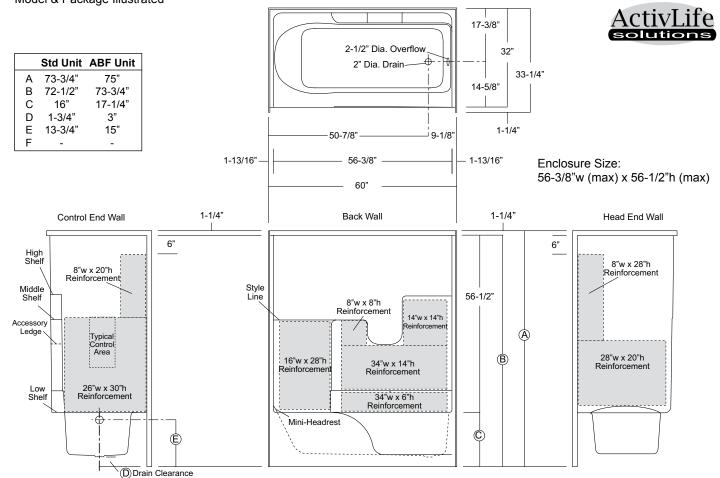

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID Package Code Description (define configuration referencing drain end)

TS-6032 L (Std or ABF) TS-6032 R (Std or ABF) / 3SM (left drain) / 3SM (right drain) 60" x 32", end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 3-side, mid-level reinforcement.

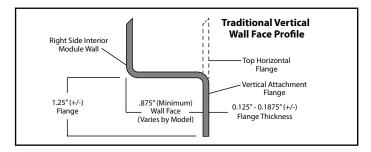

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

1 ANS17 package code: 5-bar package with folding or removable RH or LH seat & shower rod, based on ANSI-2017
2. ADA10 package code: 4-bar package with folding or removable RH or LH seat & shower rod, based on ADA-2010

3. 5BAR package code: 5-bar package replicates ANS17 bar configuration (less seat & shower rod)
4. 4BAR package code: 4-bar package replicates ADA10 bar configuration (less seat & shower rod)

5. BP1-60 & BP2-60 package codes: 2-wall, 2-bar or 3-bar packages

Reinforced ONLY Packages:

6. FH package code: reinforcement for a single vertical & horizontal bars, based on HUD/FHA-Fair Housing

7. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)

NOTE: ABF version is required for ADA & ANSI seat height compliance