



Model ID	Package Code	Description (define configuration referencing drain end)
----------	--------------	--

TS4P-6030 L (Std or ABF)	/ BP2-60 (left drain)	60" x 30", 4-piece, end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.50" dia. stainless steel 3-bar package (single horizontal bars on back wall and control wall, single vertical bar on control wall).
TS4P-6030 R (Std or ABF)	/ BP2-60 (right drain)	

**Powder Coated Bar Packages (1.25-inch dia.)**

TS4P-6030 L (Std or ABF)	/ BP2-60 WHT (left drain)	60" x 30", 4-piece, end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. white powder coated, 3-bar package (single horizontal bars on back wall and control wall, single vertical bar on control wall).
TS4P-6030 R (Std or ABF)	/ BP2-60 WHT (right drain)	

TS4P-6030 L (Std or ABF)	/ BP2-60 OFW (left drain)	60" x 30", 4-piece, end drain, tub-shower with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. off-white powder coated 3-bar package (single horizontal bars on back wall and control wall, single vertical bar on control wall).
TS4P-6030 R (Std or ABF)	/ BP2-60 OFW (right drain)	

TS4P-6030 L (Std or ABF)	/ BP2-60 SNK (left drain)	60" x 30", 4-piece, end drain, tub-shower with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. nickel 3-bar package (single horizontal bars on back wall and control wall, single vertical bar on control wall).
TS4P-6030 R (Std or ABF)	/ BP2-60 SNK (right drain)	

ADD / SHWR ROD-TS      Factory installed 1" dia. stainless steel shower curtain rod.

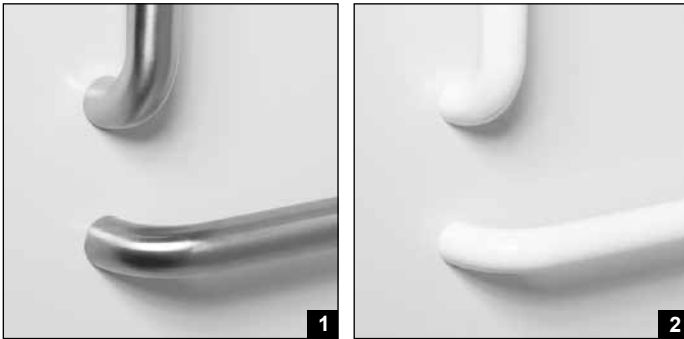
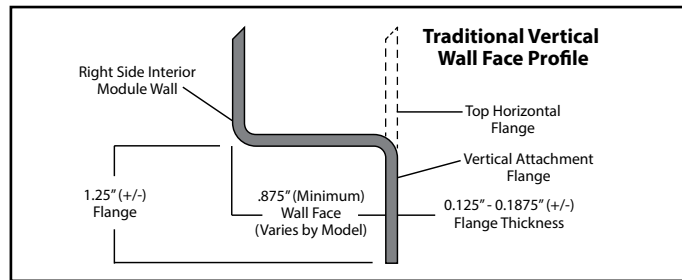


Photo 1: Grab Bars: Factory-installed 1.50-inch dia. stainless steel, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

**Available Factory Installed Packages** (model available without any component or reinforcement packages)

**Component Packages:**

1. BP1-60 & BP2-60 package codes: 2-wall, 2-bar or 3-bar packages

**Reinforced ONLY Packages:**

2. FH package code: reinforcement for vertical & horizontal bars, based on HUD/FHA-Fair Housing