



Model ID	Package Code	Description (define configuration referencing seat side)
SH-4234 (Std or ABF)	/ TLV-RS (right seat)	42" x 34", center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.50" dia. stainless steel 3-bar and seat package (single horizontal back wall bar, single horizontal and vertical bar on side wall opposite seat, and folding seat).
SH-4234 (Std or ABF)	/ TLV-LS (left seat)	

Powder Coated Bar Packages (1.25-inch dia.)

SH-4234 (Std or ABF)	/ TLV-RS WHT (right seat)	42" x 34", center drain shower with 4" (std) or 6" (ABF) dam, and ActivLife 1.25" dia. white powder coated 3-bar and seat package (single horizontal back wall bar, single horizontal and vertical bar on side wall opposite seat, and folding seat).
SH-4234 (Std or ABF)	/ TLV-LS WHT (left seat)	

Package Notes:

1. Model available without listed package.
2. Model available without vertical bar on control side wall, see ActivLife "TL-RS/LS" package code.
3. Model available without seat, see ActivLife "BP1", "BP2", and "BP5" package codes.
4. For REINFORCEMENT ONLY for bars (HUD/FHA-Fair Housing), see ActivLife "FH" and "FHV" package codes.
5. For expanded reinforcement package options, (with or without listed package components), see ActivLife "3SM" and "3SF" package codes.

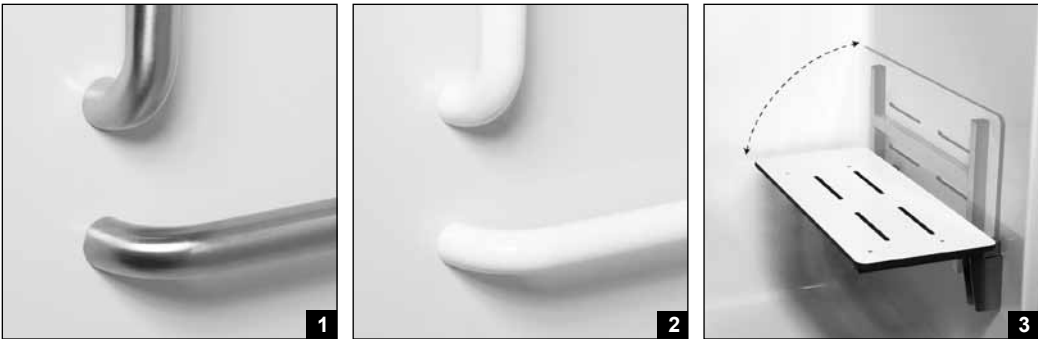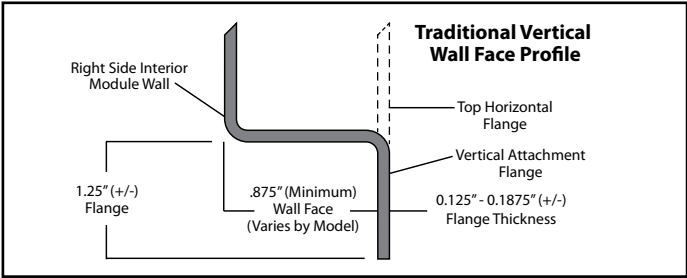

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 3: Shower Bench Seat: Factory-installed shower bench seat with non-porous, high-pressure laminate upper and lower surfaces, fused to high-density phenolic core. The seat area secures to an 18 gauge, #304 stainless steel framework, and easily pivots upward to store along the wall without supplemental fasteners. Heavy-duty wall (hinge) bracket design eliminates supplemental legs and is formed from 10 gauge, #304 brushed stainless steel. (Reinforced area includes a structural core material encapsulated in FRP composite.)