## 60-inch / Private Access / Bars & Seat

## Oasis 60-inch Shower Compartment With Integral Molded Seat and ActivLife 2-Bar (2-horizontal) Package




**Specification** – Oasis one-piece FRP gelcoat shower compartment SH-6036 RS or LS, having a single contoured seat and offered in a standard 4-inch or 6-inch (ABF) dam configuration. ActivLife package includes a horizontal bar across the back wall and across the control wall.

## Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.

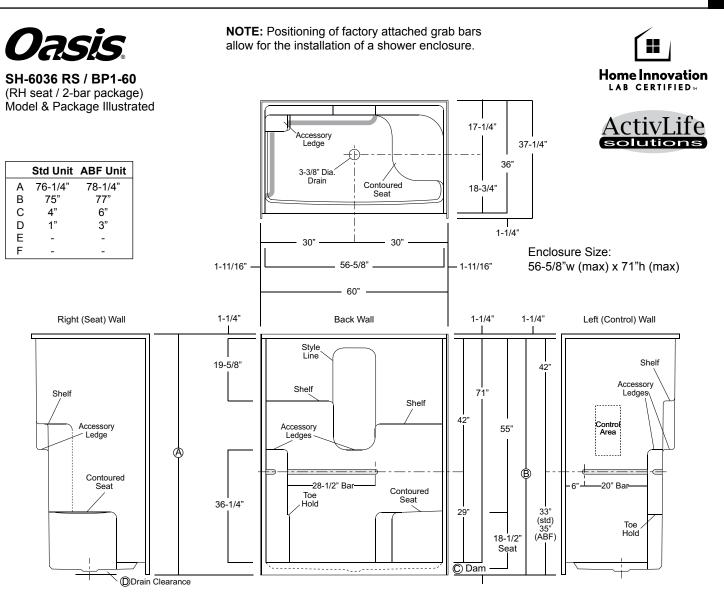

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / -1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation


Model ID Package C	ode Description (define configuration referencing seat side)
SH-6036 RS (right seat)(Std or ABF) / BP1-60 SH-6036 LS (left seat)(Std or ABF) / BP1-60	60" x 36", center drain shower with single contoured seat, 4" (std) or 6" (ABF) dam, and ActivLife 1.50" dia. stainless steel 2-bar package (single horizontal back wall bar, single horizontal bar on control wall).
Powder Coated Bar Packages (1.25-inch dia.)	
SH-6036 RS (right seat)(Std or ABF) / BP1-60 WH SH-6036 LS (left seat)(Std or ABF) / BP1-60 WH	<b>J</b>
SH-6036 RS (right seat)(Std or ABF) / BP1-60 SNK SH-6036 LS (left seat)(Std or ABF) / BP1-60 SNK	<b>J</b>
ADD / SHWR ROD-S	H Factory installed 1" dia. stainless steel shower curtain rod.

.875" (Minimum)

Traditional Vertical Wall Face Profile

> Top Horizontal Flange Vertical Attachment Flange

Flange Thickness

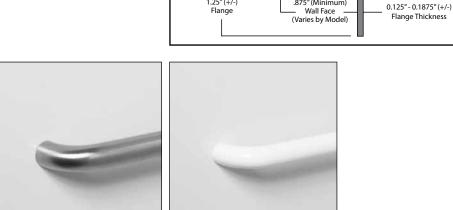

1

**Right Side Interior** Module Wall

1.25" (+/-)

Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed Photo 1: attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

2

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

- **Component Packages:** 
  - 1. BP1-60 & BP2-60 package codes: 2-wall, 2-bar or 3-bar packages

## Reinforced ONLY Packages:

- 2. FH package code: reinforcement for a single vertical & horizontal bars, based on HUD/FHA-Fair Housing
- 3. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)