

Oasis 48-inch, Acrylic Shower Compartment With Integral Unit Dome and ActivLife 2-Bar (2-horizontal) And Folding Seat Package



Specification – Oasis one-piece, 48 x 32-3/4-inch deep, vacuum formed acrylic shower with integral unit dome and center drain, model SHA-DM-4833, offered in a standard 4.5-inch or 6-inch (ABF) dam configuration. ActivLife package includes a horizontal bar across the back wall and side wall opposite the seat, and a folding seat.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar and seat package is certified through an independent review program.

48-inch / Private Access / Bars & Seat

Oasis

SHA-DM-4833 / TL-LS
(LH seat / 2-bar package)
Model & Package Illustrated


	Std Unit	ABF Unit
A	89-3/8"	90-7/8"
B	-	-
C	4-1/2"	6"
D	1"	2-1/2"
E	-	-
F	-	-

NOTE: Positioning of factory attached grab bars allow for installation of a shower enclosure.



Home Innovation
LAB CERTIFIED™

ActivLife
solutions

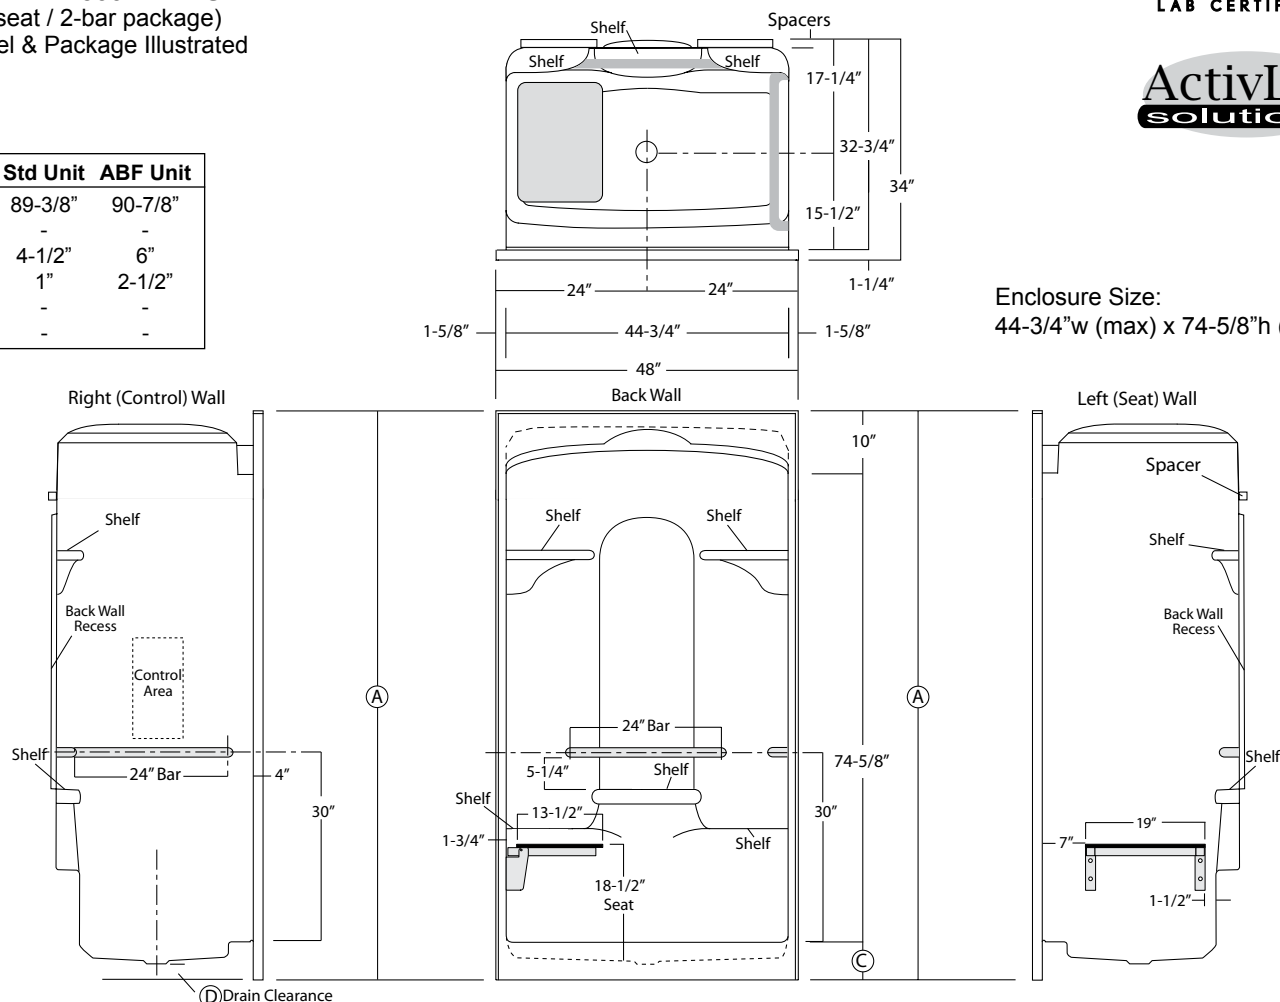




Enclosure Size:
44-3/4" w (max) x 74-5/8" h (max)

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch).
Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description (define configuration referencing control wall)
SHA-DM-4833 (Std or ABF)	/ TL-RS (right seat)	48" x 32-3/4", integral dome acrylic shower with center drain, 4.5" (Std) or 6" (ABF) dam, and ActivLife 1.50" dia. stainless steel 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).
SHA-DM-4833 (Std or ABF)	/ TL-LS (left seat)	
Powder Coated Bar Packages (1.25-inch dia.)		
SHA-DM-4833 (Std or ABF)	/ TL-RS WHT (right seat)	48" x 32-3/4", integral dome acrylic shower with center drain, 4.5" (Std) or 6" (ABF) dam, and ActivLife 1.25" dia. white powder coated 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).
SHA-DM-4833 (Std or ABF)	/ TL-LS WHT (left seat)	
SHA-DM-4833 (Std or ABF)	/ TL-RS OFW (right seat)	48" x 32-3/4", integral dome acrylic shower with center drain, 4.5" (Std) or 6" (ABF) dam, and ActivLife 1.25" dia. off-white powder coated 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).
SHA-DM-4833 (Std or ABF)	/ TL-LS OFW (left seat)	
SHA-DM-4833 (Std or ABF)	/ TL-RS SNK (right seat)	48" x 32-3/4", integral dome acrylic shower with center drain, 4.5" (Std) or 6" (ABF) dam, and ActivLife 1.25" dia. nickel finish 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).
SHA-DM-4833 (Std or ABF)	/ TL-LS SNK (left seat)	

Package Notes:

1. Model available without listed package.
2. Model available with vertical bar on control side wall, see ActivLife "TLV-RS/LS" package code.
3. For packages without seat, see ActivLife "BP1" and "BP2" package codes.

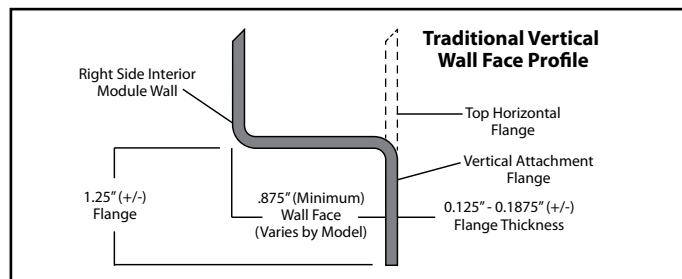

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 3: Shower Bench Seat: Factory-installed shower bench seat with non-porous, high-pressure laminate upper and lower surfaces, fused to high-density phenolic core. The seat area secures to an 18 gauge, #304 stainless steel framework, and easily pivots upward to store along the wall without supplemental fasteners. Heavy-duty wall (hinge) bracket design eliminates supplemental legs and is formed from 10 gauge, #304 brushed stainless steel. (Reinforced area includes a structural core material encapsulated in FRP composite.)