

Transfer / Private Access / Bars & Seat RF



Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.




SHFW-3837 / 2BAR-L
(RH seat reinforcement /
2-bar package)
Model & Package Illustrated

NOTE: ANSI regulations limit the use of seat deleted packages to certain non-public use applications (see ADA & ANSI standards for restrictions).



Home Innovation
LAB CERTIFIED™

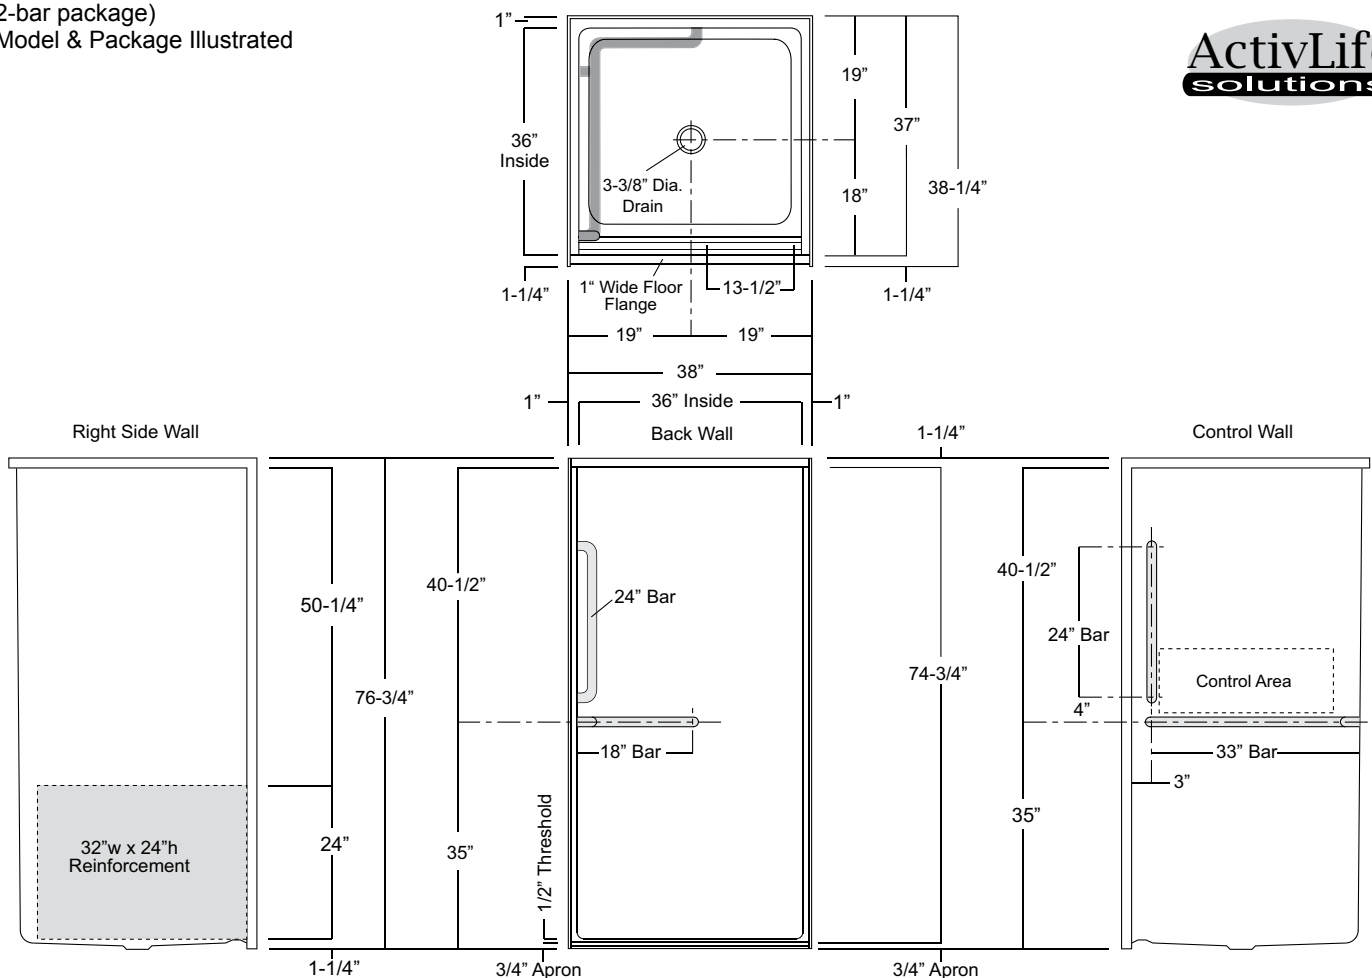

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description (define configuration referencing control side)
SHFW-3837	/ 2BAR-R (right control)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.50" dia. stainless steel 2-bar package (single horizontal inside corner bar & single vertical control wall bar) with seat reinforcement opposite control wall.
SHFW-3837	/ 2BAR-L (left control)	
Powder Coated Bar Packages (1.25-inch dia.)		
SHFW-3837	/ 2BAR-R WHT (right wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. white powder coated 2-bar (single horizontal corner bar across the control wall and back wall, single vertical bar on control wall) and seat reinforcement opposite control wall..
SHFW-3837	/ 2BAR-L WHT (left wall)	
	ADD / SHWR ROD-SH	Factory installed 1" dia. stainless steel shower curtain rod.

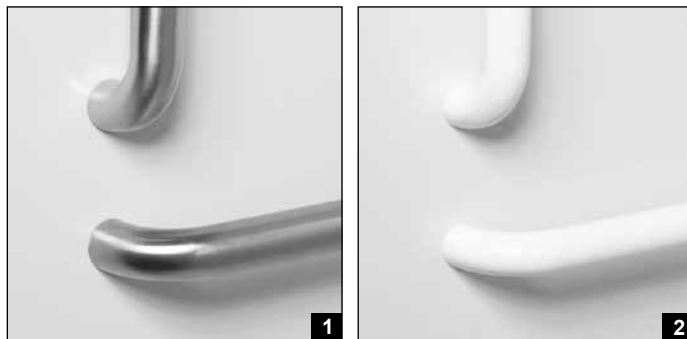
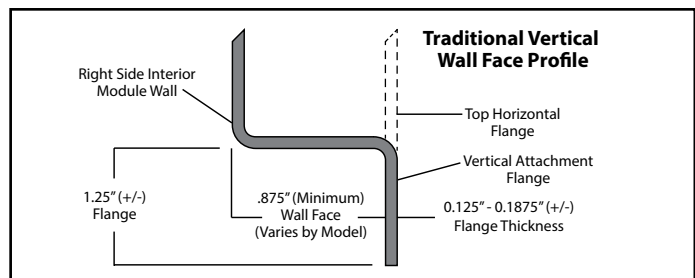
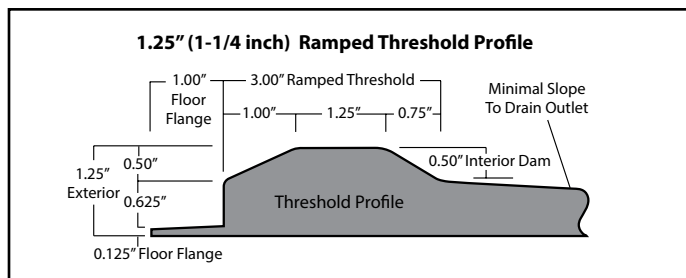


Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

1. ANS17 package code: 2-wall, 2-bar package (1-vertical bar) with phenolic folding RH or LH seat & shower rod, based on ANSI-2017
2. ADA10 package code: 2-wall, 2-bar package with phenolic folding RH or LH seat & shower rod, based on ADA-2010
3. 2BAR package code: 2-wall, 2-bar package (1-vertical bar) with RH or LH seat reinforcement
4. ICBAR package code: 2-wall, single-bar package with RH or LH seat reinforcement

Reinforced **ONLY** Packages:

5. FH-RS/LS package code: reinforcement for horizontal bars & RH or LH seat, replicating ADA package
6. FHV-RS/LS package code: reinforcement for a vertical bar, horizontal bars & RH or LH seat, replicating ANS package
7. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)