

SHFW-3837 / ICBAR-L


package)

(RH seat reinforcement / 2-wall bar

NOTE: ADA regulations limit the use of seat deleted packages to certain non-public use applications (see ADA & ANSI standards for restrictions).


Home Innovation LAB CERTIFIED TM




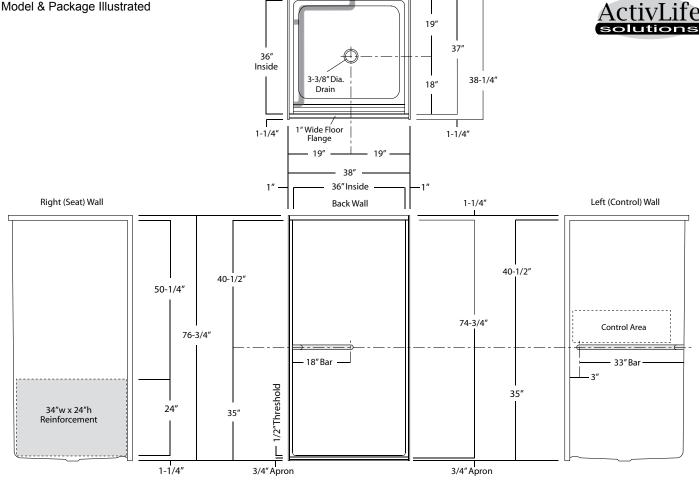

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation

Model ID	Package Code	Description (define configuration referencing control side)
SHFW-3837 SHFW-3837	/ ICBAR-R / ICBAR-L	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.50" dia. stainless steel single horizontal inside corner bar with seat reinforcement opposite control wall.
Powder Coated Bar Packages (1.25-inch dia.)		
SHFW-3837 SHFW-3837	/ ICBAR-R WHT (right wall) / ICBAR-L WHT (left wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. white powder coated bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
SHFW-3837 SHFW-3837	/ ICBAR-R SNK (right wall) / ICBAR-L SNK (left wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. nickel finish bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
	ADD / SHWR ROD-SH	Factory installed 1" dia. stainless steel shower curtain rod.

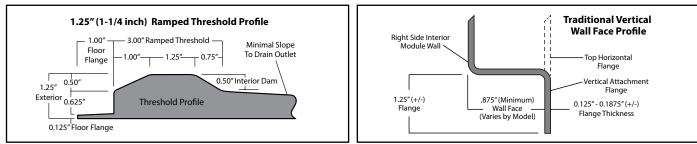

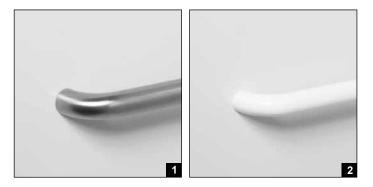

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

- 1 ANS17 package code: 2-wall, 2-bar package (1-vertical bar) with phenolic folding RH or LH seat & shower rod, based on ANSI-2017
- 2. ADA10 package code: 2-wall, 2-bar package with phenolic folding RH or LH seat & shower rod, based on ADA-2010
- 3. 2BAR package code: 2-wall, 2-bar package (1-vertical bar) with RH or LH seat reinforcement
- 4. ICBAR package code: 2-wall, single-bar package with RH or LH seat reinforcement

Reinforced ONLY Packages:

- 5. FH-RS/LS package code: reinforcement for horizontal bars & RH or LH seat, replicating ADA package
- 6. FHV-RS/LS package code: reinforcement for a vertical bar, horizontal bars & RH or LH seat, replicating ANS package
- 7. FHV-DS package code: reinforcement for vertical & horizontal bars, RH & LH seat, replicating ANS package
- 8. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)