48-inch / Private Access / Bars Only

Oasis 48-inch, Ramped Threshold Shower Compartment With ActivLife 3-Bar (2-horizontal / 1-vertical) Package




Specification – Oasis one-piece FRP gelcoat shower compartment SHFW-4836, having a 1/2-inch high maximum finished, ramped threshold with floor attachment flange on lower threshold. ActivLife package includes a horizontal bar across the back wall, a bar across the control wall, and a vertical bar at the entry on the control wall.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar and seat package is certified through an independent review program.

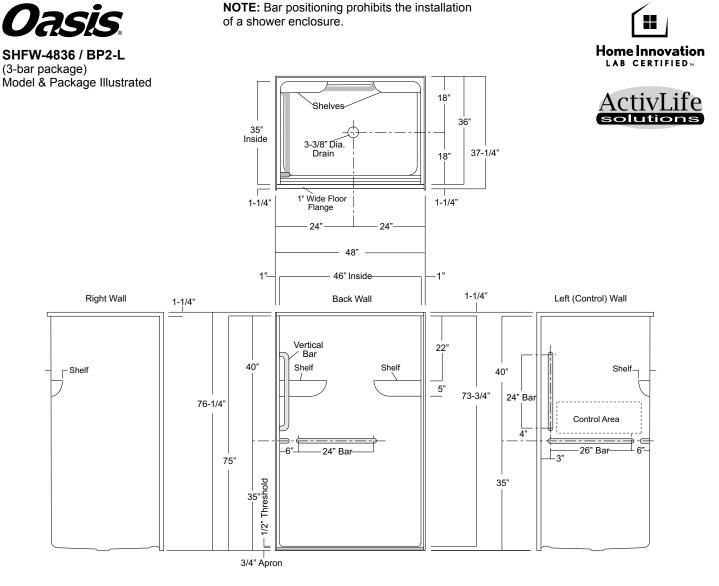

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / -1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation

Model ID	Package Code	Description (define configuration referencing control side)
SHFW-4836 SHFW-4836	/ BP2-R (right wall) / BP2-L (left wall)	48" x 36", center drain, ramped threshold shower with ActivLife 1.50" dia. stainless steel 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall).
Powder Coated Bar	Packages (1.25-inch dia.)	
SHFW-4836 SHFW-4836	/ BP2-R WHT (right wall) / BP2-L WHT (left wall)	48" x 36", center drain, ramped threshold shower with ActivLife 1.25" dia. white powder coated 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall)
SHFW-4836 SHFW-4836	/ BP2-R SNK (right wall) / BP2-L SNK (left wall)	48" x 36", center drain, ramped threshold shower with ActivLife 1.25" dia. nickel finish 3-bar package (single horizontal bar on back wall and control wall, single vertical bar on control wall).
Fla 1/2" Hi	nge - 1 7/16"	Right Side Interior Module Wall

1.25" (+/-)

Flange


.875" (Minimum)

Wall Face

(Varies by Model)

1.25"-Contoured Threshold Profile

Structural Core

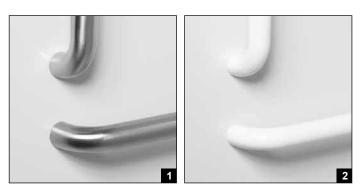

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages: 1 TLV package code:

Room Side Apron

Floor Flange

- 2-wall, 3-bar package with phenolic folding RH or LH seat
- 2. TL package code: 2-wall, 2-bar package with phenolic folding RH or LH seat
- BP2 package code:
 BP1 package code:
- 2-wall, 3-bar package 2-wall, 2-bar package

Reinforced ONLY Packages:

- 5. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing
- 6. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)

cal Attachment Flange

0.125" - 0.1875" (+/-)

Flange Thickness