

38-inch / Private Access / Bars & Seat RF




NOTE: The raised threshold of this model DOES NOT meet ADA or ANSI compliance.

Oasis®

Home Innovation
LAB CERTIFIED™

ActivLife
solutions


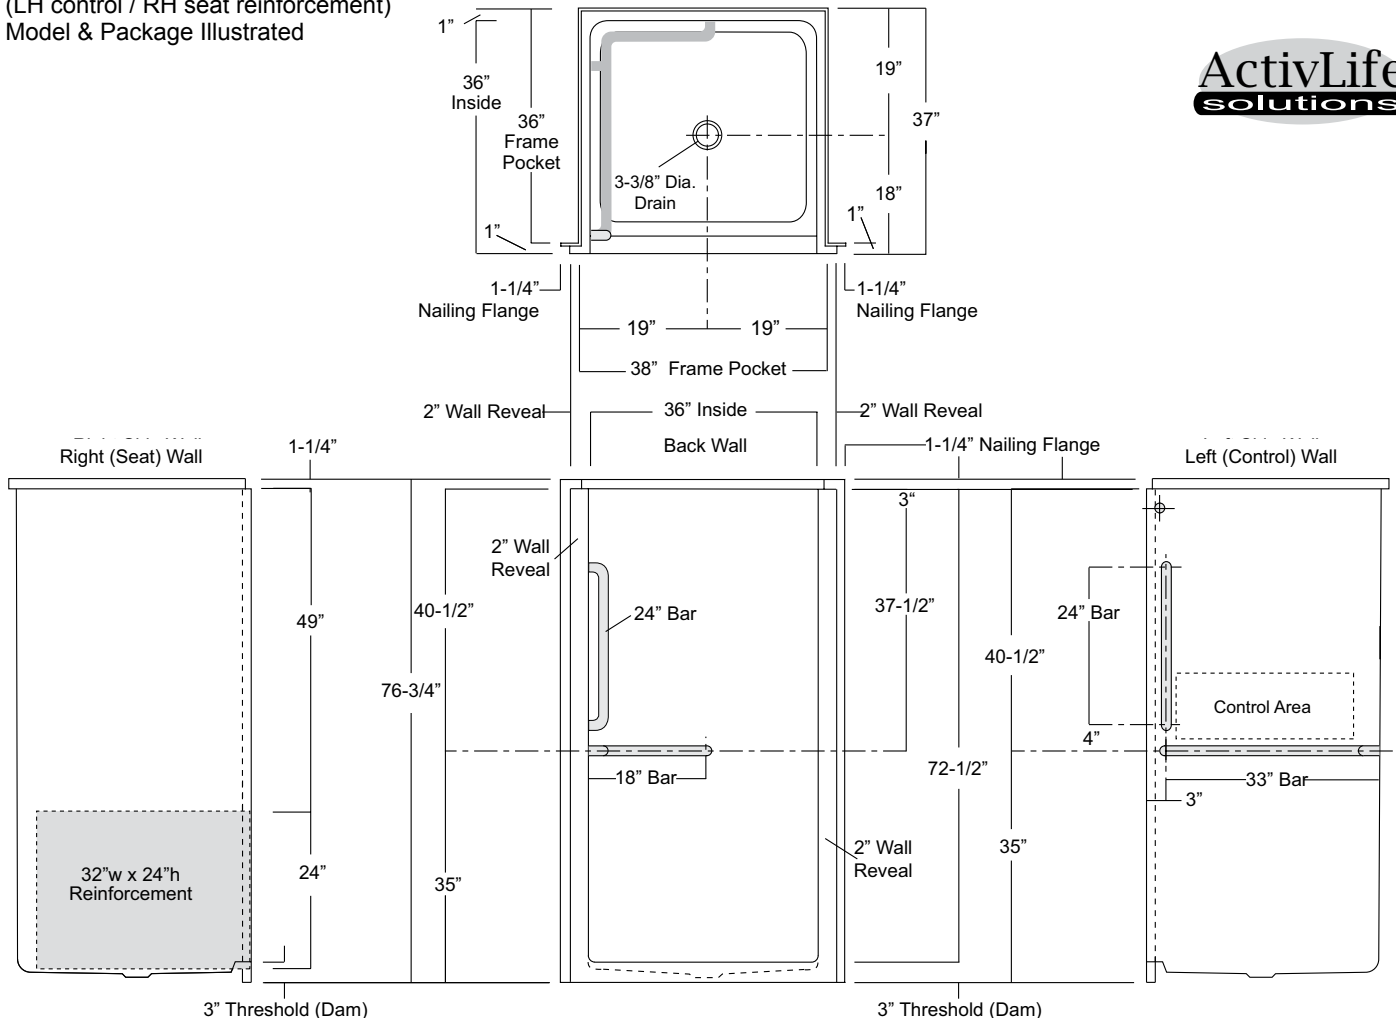


Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / -1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description (define configuration referencing control side)
SHFW-WX3D-3837	/ 2BAR-R (right wall)	<i>36" x 36" minimum interior, center drain, wall face expanded, 3-inch threshold shower with an ActivLife 1.50" dia. stainless steel 2-bar (single horizontal corner bar across the control wall and back wall, single vertical bar on control wall) and seat reinforcement opposite control wall.</i>
SHFW-WX3D-3837	/ 2BAR-L (left wall)	

Powder Coated Bar Packages (1.25-inch dia.)

SHFW-WX3D-3837	/ 2BAR-R WHT (right wall)	<i>36" x 36" minimum interior, center drain, wall face expanded, 3-inch threshold shower with an ActivLife 1.25" dia. white powder coated 2-bar (single horizontal corner bar across the control wall and back wall, single vertical bar on control wall) and seat reinforcement opposite control wall.</i>
SHFW-WX3D-3837	/ 2BAR-L WHT (left wall)	
SHFW-WX3D-3837	/ 2BAR-R SNK (right wall)	<i>36" x 36" minimum interior, center drain, wall face expanded, 3-inch threshold shower with an ActivLife 1.25" dia. nickel finish 2-bar (single horizontal corner bar across the control wall and back wall, single vertical bar on control wall) and seat reinforcement opposite control wall.</i>
SHFW-WX3D-3837	/ 2BAR-L SNK (left wall)	

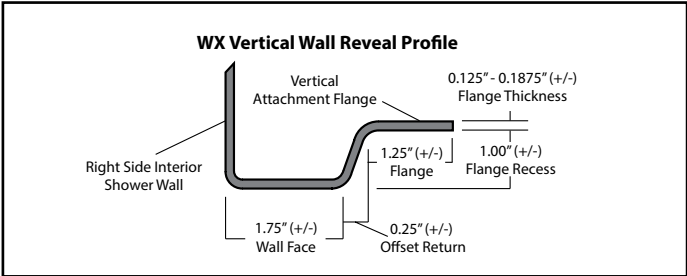

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

- 2BAR package code: 2-wall, 2-bar package (1-vertical bar) with RH or LH seat reinforcement
- ICBAR package code: 2-wall, single-bar package with RH or LH seat reinforcement

Reinforced ONLY Packages:

- FH-RS/LS package code: reinforcement for horizontal bars & RH or LH seat, based on HUD/FHA-Fair Housing
- FHV-RS/LS package code: reinforcement for a vertical bar, horizontal bars & RH or LH seat, based on HUD/FHA-Fair Housing
- 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)