
Oasis Minimal Threshold, Roll-In Shower Compartment With ActivLife (ICC/ANSI A117.1-2017 Compliant) 2-Side Horizontal Bar & Seat Reinforcement Package (not for public accommodation)



Specification – Oasis one-piece FRP gelcoat shower compartment SHMT-6232, having a 60 x 30-inch minimum clear interior dimension and $\frac{1}{2}$ -inch high maximum finished threshold with floor attachment flange on lower threshold. An ActivLife factory-equipped package, in compliance with ICC/ANSI A117.1-2009 for Accessible Design, shall include a horizontal bar across the control wall and back wall with seat reinforcement opposite the control wall.

Standards Certification:


The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

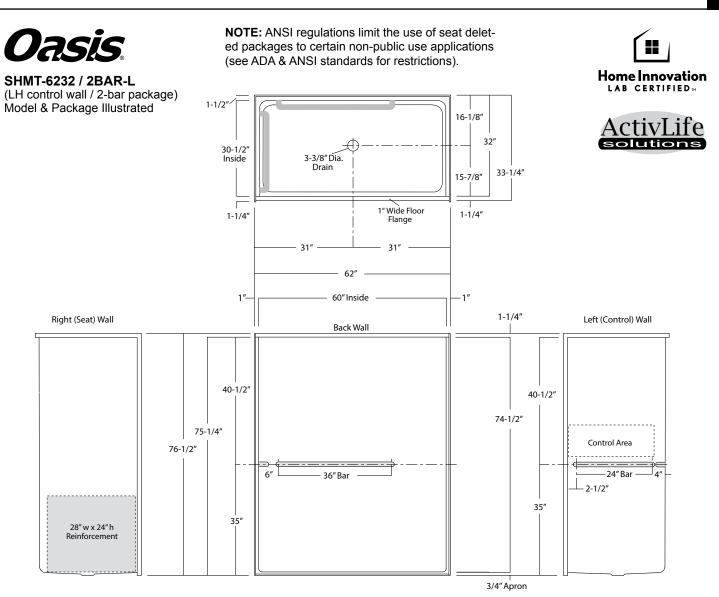

Model ID	Package Code	Description (define configuration referencing control wall)
SHMT-6232 SHMT-6232	/ 2BAR-R (right control wall) / 2BAR-L (left control wall)	60" x 30" minimum interior, center drain, minimal threshold shower with an ActivLife 1.50" dia. stainless steel 2-bar and seat reinforcement package (horizontal back & control wall bars with seat reinforcement opposite control wall).
Powder Coated	d Bar Packages (1.25-inch dia.)	
SHMT-6232 SHMT-6232	/ 2BAR-R WHT (right control wall) / 2BAR-L WHT (left control wall)	60" x 30" minimum interior, center drain, minimal threshold shower with an ActivLife 1.25" dia. white powder coated 2-bar and seat reinforcement package (horizontal back & control wall).
SHMT-6232 SHMT-6232	/ 2BAR-R SNK (right control wall) / 2BAR-L SNK (left control wall)	60" x 30" minimum interior, center drain, minimal threshold shower with an ActivLife 1.25" dia. nickel finish 2-bar and seat reinforcement package (horizontal back & control wall bars with seat reinforcement opposite control wall).

ADD / SHWR ROD-SH

Factory installed 1" dia. stainless steel shower curtain rod.

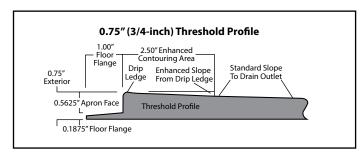








Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages) Component Packages:

1 ANS17 package code:	2-wall, 3-bar package with phenolic folding RH or LH seat & shower rod, based on ANSI-2017
ADA/TL package code:	2-wall, 2-bar package with phenolic folding RH or LH seat & shower rod, based on ADA-2010
ADA-RI package code:	3-wall, 3-bar package and shower rod, based on ADA-2010 & ANSI-2017

4. 2BAR & 3BAR package code: 2-wall, 2-bar or 3-bar packages with RH or LH seat reinforcement

Reinforced ONLY Packages:

- 5. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing
- 6. TLRF-RS/LS & TLVRF-RS/LS pkg codes: replicating "ADA" & "ANSI" component packages with single seat reinforcement
- 7. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)