50-inch / Private Access / Bars Only

Oasis 50-inch, Simulated Tile Shower Compartment With ActivLife 3-Bar (3-horizontal) Package




Specification – Oasis one-piece FRP gelcoat shower compartment SHT-5038, offered in a standard 3-inch or 5-inch (ABF) dam configuration. ActivLife package includes a single horizontal bar on the back wall and single horizontal bars on each side wall.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.

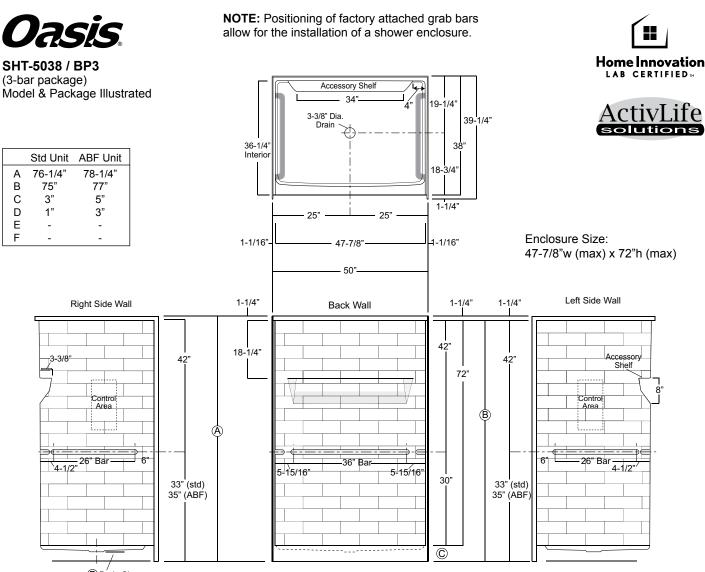

D Drain Clearance

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: + / -1/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description
SHT-5038 (Std or ABF)	/ BP3	50" x 38", center drain shower with 3" (std) or 5" (ABF) dam, and ActivLife 1.50" dia. stainless steel 3-bar package (single horizontal back wall bar, single horizontal bar on both side walls).
Powder Coated Bar Pack	ages (1.25-inch dia.)	
SHT-5038 (Std or ABF)	/ BP3 WHT	50" x 38", center drain shower with 3" (std) or 5" (ABF) dam, and ActivLife 1.25" dia. white powder coated 3-bar package (single horizontal back wall bar, single horizontal bar on both side walls).
SHT-5038 (Std or ABF)	/ BP3 SNK	50" x 38", center drain shower with 3" (std) or 5" (ABF) dam, and ActivLife 1.25" dia. nickel finish 3-bar package (single horizontal back wall bar, single horizontal bar on both side walls).
	Right Side Interio Module Wall S 1.25" (+/-) Flange	or .875" (Minimum) Wall Face Wall Face Vertical Attachment Flange 0.125" - 0.1875" (+/-) Flange Thickness

- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages: 1 TLV package code:

2-wall, 3-bar package with phenolic folding RH or LH seat

- 2. TL package code: 2-wall, 2-bar package with phenolic folding RH or LH seat
- 3. BP2 package code: 2-wall, 3-bar package
- 4. BP1 package code: 2-wall, 2-bar package
- 5. BP3 package code:
- 3-wall, 3-bar package 6. BP5 package code: 1-wall, 1-bar package

Reinforced ONLY Packages:

7. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing

8. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)