Oasis 60 x 36 Simulated Tile Wall Bathtub With ActivLife 4-Bar (4-horizontal) Package



Specification – Oasis one-piece, 60 x 36-inch deep, FRP gelcoat flat wall bathtub model TST-6036 offered in a standard 16-inch or 17.25-inch (ABF) apron height. Activ-Life package includes 2-horizontal bars on back wall along with a single horizontal bar on head end wall and on the control wall.

Standards Certification:


The bathtub listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.



NOTE: Positioning of factory attached grab bars allow for the installation of a shower enclosure.



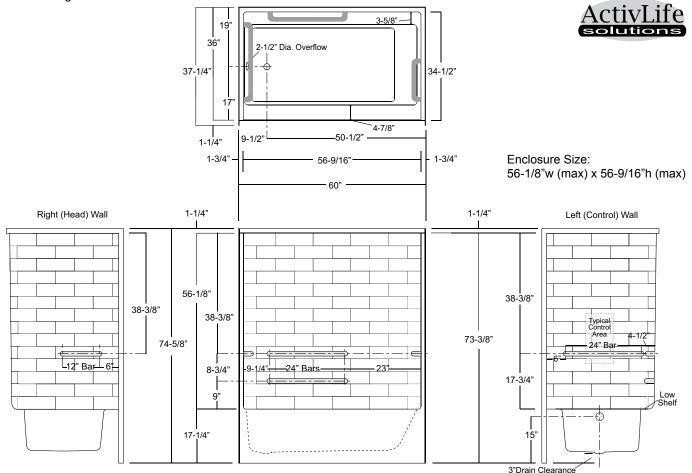

Model ID	Package Code	Description (define configuration referencing drain end)
TST-6036 L ABF TST-6036 R ABF	/ 4BAR (left drain) / 4BAR (right drain)	60" x 36", end drain, tub-shower with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.50" dia. stainless steel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).
Powder Coated Bar Packages (1.25-inch dia.)		
TST-6036 L ABF TST-6036 R ABF	/ 4BAR WHT (left drain) / 4BAR WHT (right drain)	60" x 36", end drain, tub-shower with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. white powder coated 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).
TST-6036 L ABF TST-6036 R ABF	/ 4BAR SNK (left drain) / 4BAR SNK (right drain)	60" x 36", end drain, tub-shower with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. nickel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).

ADD / SHWR ROD-TS Factory installed 1" dia. stainless steel shower curtain rod.

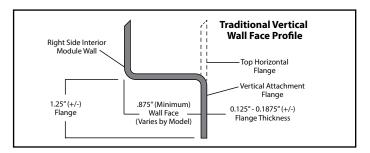






Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)

Component Packages:

5BAR package code:
 4BAR package code:
 5-bar package
 4-bar package

3. BP1-60 & BP2-60 package codes: 2-wall, 2-bar or 3-bar packages

Reinforced ONLY Packages:

- 4. FH package code: reinforcement for a single vertical & horizontal bars, based on HUD/FHA-Fair Housing
- 5. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)