


TUB / SHOWER

Oasis

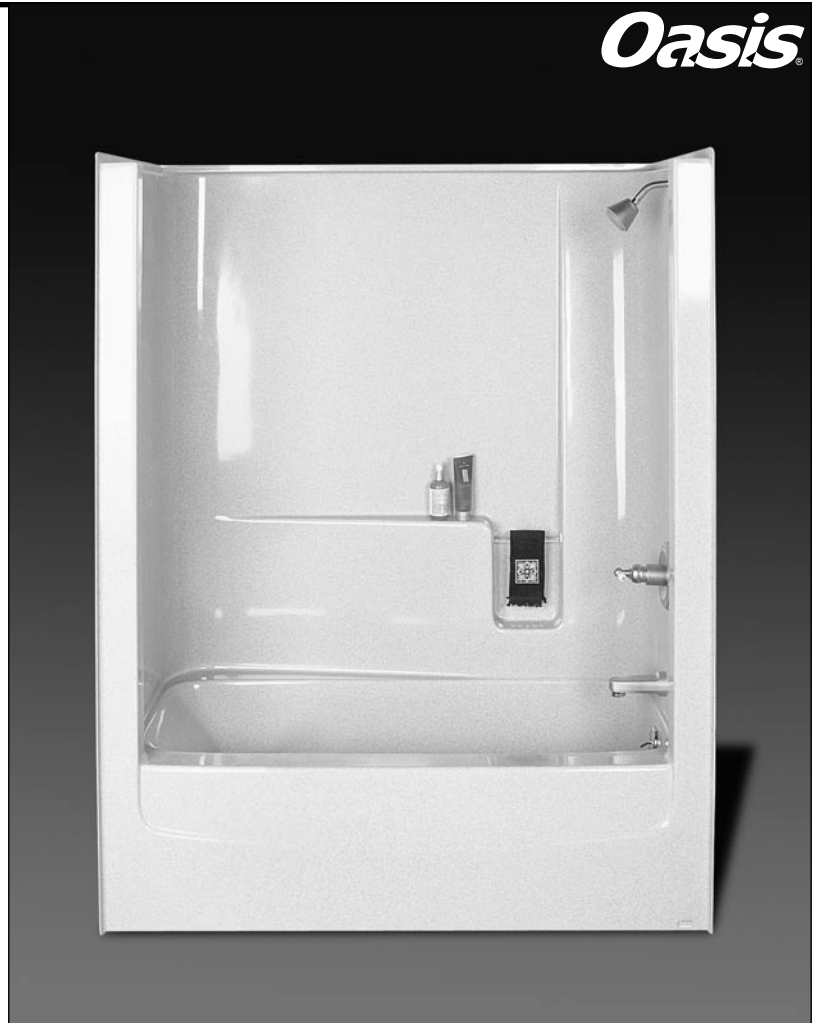

60-INCH MODEL

TS-R-45 TS-R-45 ABF (Above Floor Rough)

Rough-In Dimensions	TS-R-45	60" wide x 34-1/2" deep x 74-3/4" high
	TS-R-45 ABF	60" wide x 34-1/2" deep x 76" high

Finished Dimensions	TS-R-45	60" wide x 33-1/4" deep x 73-1/2" high
	TS-R-45 ABF	60" wide x 33-1/4" deep x 74-3/4" high

Unit Features


- One - Piece Fiberglass Composite Construction
- Sanitary Grade Polyester Gelcoat Surface
- 2" Dia. Drain / RH or LH (see reverse side for location)
- 2-1/2" Dia. Overflow (see reverse side for location)
- Elevated Back Wall Shelf
- Lower Level Soap Tray with Acrylic Rod
- Textured Floor Pattern
- Balsa Wood Core Floor Structure

Special Notes

- ABF Model Provides Additional Drain Clearance for Piping
 - UL Listed Whirlpool System Available (see reverse side for details)
-

TS-R-45R/L
TS-R-45R/L ABF

	Std Unit	ABF Unit
A	74-3/4"	76"
B	73-1/2"	74-3/4"
C	16"	17-1/4"
D	13-3/4"	15"
E	1-3/4"	3"

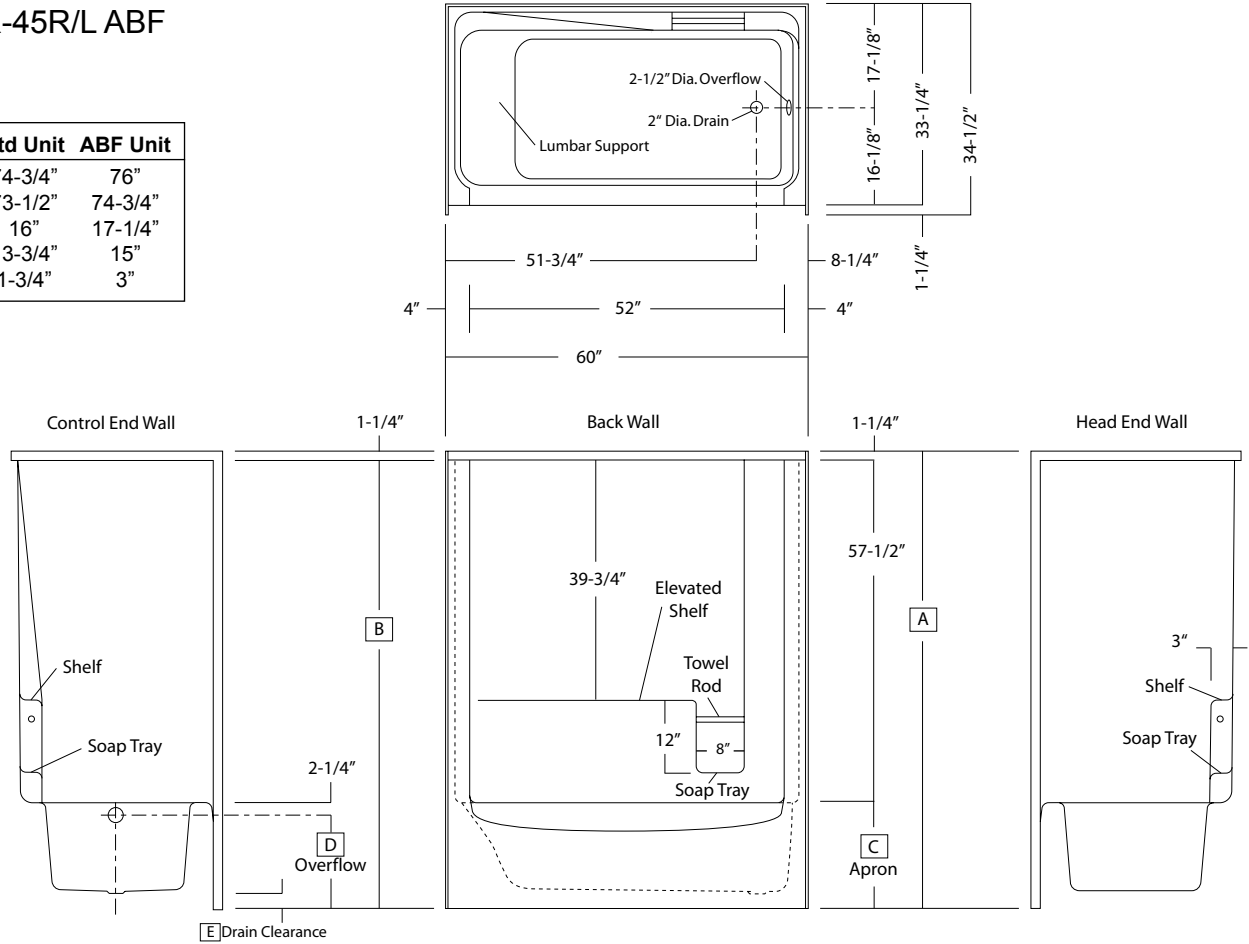

Tub/Shower Module

Order No.: TS-R-45R (RH drain)
TS-R-45R ABF (RH drain, Above Floor Rough)
TS-R-45L (LH drain)
TS-R-45L ABF (LH drain, Above Floor Rough)

60" x 33-1/4", one-piece gelcoated fiberglass tub/shower with 16" apron (ABF ver.: 17-1/4" apron with additional drain clearance for above floor plumbing), wall surround, acrylic towel rod, and end drain as indicated.

Whirlpool System

Order No.: TS-R-45R / 6P (RH drain)
TS-R-45R ABF / 6P (RH drain, Above Floor Rough)
TS-R-45L / 6P (LH drain)
TS-R-45L ABF / 6P (LH drain, Above Floor Rough)

Builder System includes: 6-Adjustable side jets, twin-air injection controls, pneumatic on/off control, and 5.8 amp pump/motor.

Options: In-Line Heater (1*) (order code ILH)
Ozone Generator (1*) (order code OZG)

Notes: (1*) Factory installed options
(2*) Includes system control upgrade

A removable access panel is not available for this model.