Oasis 3-Piece, 60-inch, Center Drain Shower Compartment With ActivLife 2-Bar (2-horizontal) And Folding Seat Package

Specification – Oasis 3-piece FRP gelcoat shower compartment SH3P-6030 center drain shower with L or R control wall, offered in a standard 4-inch or 6-inch (ABF) dam configuration. ActivLife package includes a horizontal bar across the back wall, the side wall opposite the seat, and a folding seat.

Standards Certification:
The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar and seat package is certified through an independent review program.
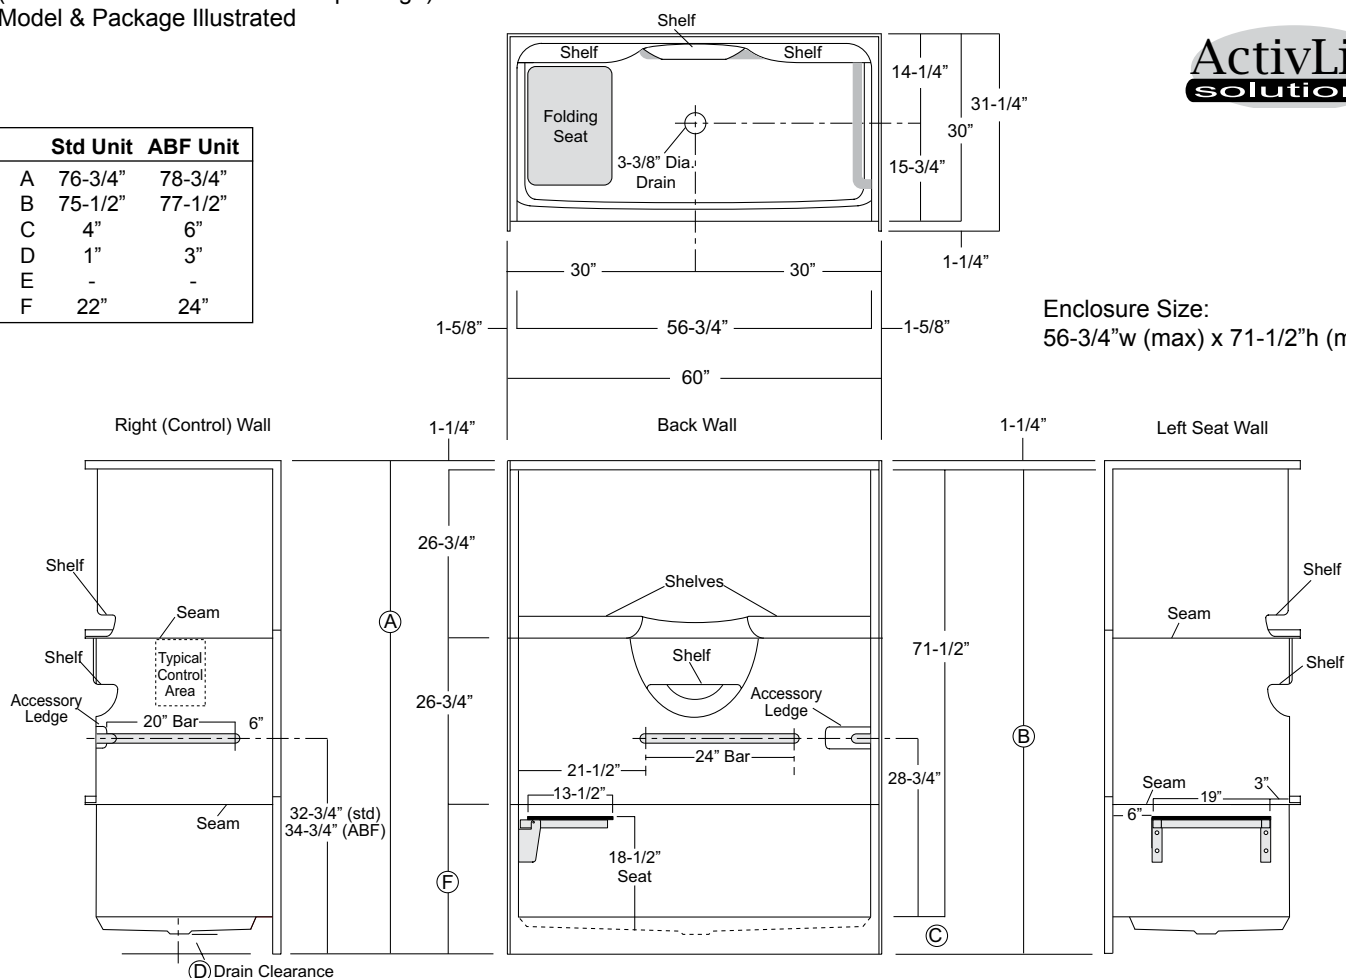
Oasis

NOTE: Positioning of factory attached grab bars and seat allow for the installation of a shower enclosure.

Home Innovation LAB CERTIFIED™

ActivLife solutions

SH3P-6030 R / TL-LS
(R control wall / LH seat / 2-bar package)
Model & Package Illustrated

	Std Unit	ABF Unit
A	76-3/4"	78-3/4"
B	75-1/2"	77-1/2"
C	4"	6"
D	1"	3"
E	-	-
F	22"	24"

Shelf
Shelf
Shelf
Folding Seat
14-1/4"
31-1/4"
30"
15-3/4"
3-3/8" Dia. Drain
1-1/4"
30"
30"
1-5/8"
56-3/4"
1-5/8"
60"

Enclosure Size:
56-3/4"w (max) x 71-1/2"h (max)

Right (Control) Wall
Shelf
Seam
Shelf
Typical Control Area
Accessory Ledge
20" Bar
6"
Seam
32-3/4" (std)
34-3/4" (ABF)
Drain Clearance
(D)

1-1/4"
26-3/4"
(A)
26-3/4"
(F)

Back Wall
Shelves
Shelf
Accessory Ledge
21-1/2"
13-1/2"
24" Bar
18-1/2" Seat

71-1/2"
28-3/4"
(B)
(C)

1-1/4"

Left Seat Wall
Shelf
Seam
Shelf
Seam
19"
3"
6"

Model ID	Package Code	Description (define configuration referencing control wall)
SH3P-6030 L (L control wall) / TL-RS (right seat) SH3P-6030 R (R control wall) / TL-LS (left seat)		*60" x 30", 3-piece, center drain shower with L or R control wall, 4" (std) or 6" (ABF) dam and ActivLife 1.50" dia. stainless steel 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).*

Powder Coated Bar Packages (1.25-inch dia.)

SH3P-6030 L (L control wall) / TL-RS WHT (right seat) SH3P-6030 R (R control wall) / TL-LS WHT (left seat)		*60" x 30", 3-piece, center drain shower with L or R control wall, 4" (std) or 6" (ABF) dam and ActivLife 1.25" dia. white powder coated 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).*
SH3P-6030 L (L control wall) / TL-RS SNK (right seat) SH3P-6030 R (R control wall) / TL-LS SNK (left seat)		*60" x 30", 3-piece, center drain shower with L or R control wall, 4" (std) or 6" (ABF) dam and ActivLife 1.25" dia. nickel finish 2-bar and seat package (horizontal back & opposite seat wall bars with folding seat).*

Traditional Vertical Wall Face Profile

Right Side Interior Module Wall

Top Horizontal Flange

Vertical Attachment Flange

1.25" (+/-) Flange

.875" (Minimum) Wall Face (Varies by Model)

0.125" - 0.1875" (+/-) Flange Thickness
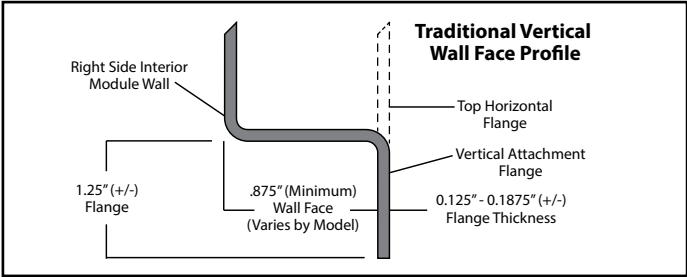
Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 3: Shower Bench Seat: Factory-installed shower bench seat with non-porous, high-pressure laminate upper and lower surfaces, fused to high-density phenolic core. The seat area secures to an 18 gauge, #304 stainless steel framework, and easily pivots upward to store along the wall without supplemental fasteners. Heavy-duty wall (hinge) bracket design eliminates supplemental legs and is formed from 10 gauge, #304 brushed stainless steel. (Reinforced area includes a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages)
    Component Packages:
    1 TLV package code: 2-wall, 3-bar package with phenolic folding RH or LH seat
    2. TL package code: 2-wall, 2-bar package with phenolic folding RH or LH seat
    3. BP2 package code: 2-wall, 3-bar package
    4. BP1 package code: 2-wall, 2-bar package

    Reinforced ONLY Packages:
    5. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing
    6. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)