
Oasis WX Configured, Ramped Threshold, Transfer Shower Compartment With ActivLife Horizontal Bar Only Package (Not For Common Or Public Accommodation)



Specification – Oasis one-piece FRP gelcoat shower compartment SHFW-WX-3837, having a 36 x 36-inches clear interior dimension and ½-inch high maximum finished threshold with floor attachment flange on lower threshold, and expanded shower entry wall reveal to minimize transfer space. An ActivLife factory-equipped package shall include a horizontal interior corner bar across control wall and on back wall, and reinforcement for seat opposite control wall.

Standards Certification:


The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

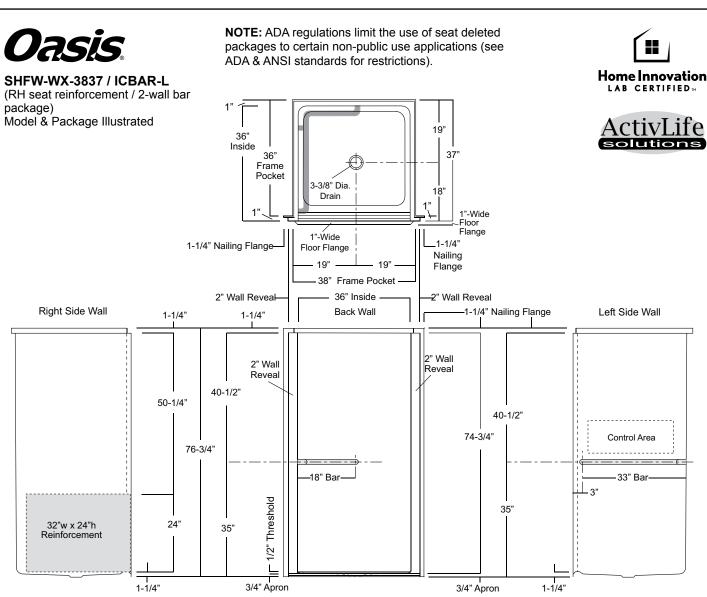


Model ID	Package Code	Description (define configuration referencing control side)
SHFW-WX-3837 SHFW-WX-3837	/ ICBAR-R / ICBAR-L	36" x 36" interior, center drain, wall face expanded, ramped 1/2-inch threshold shower, with ActivLife 1.50" dia. stainless steel single horizontal inside corner bar on the control and back wall and seat reinforcement opposite control wall.
Powder Coated Bar Packages (1.25-inch dia.)		
SHFW-WX-3837 SHFW-WX-3837	/ ICBAR-R WHT (right wall) / ICBAR-L WHT (left wall)	36" x 36" interior, center drain, wall face expanded, ramped 1/2-inch threshold shower, with ActivLife 1.25" dia. white powder coated bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
SHFW-WX-3837 SHFW-WX-3837	/ ICBAR-R SNK (right wall) / ICBAR-L SNK (left wall)	36" x 36" interior, center drain, wall face expanded, ramped 1/2-inch threshold shower, with ActivLife 1.25" dia. nickel finish bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.

ADD / SHWR ROD-SH

Factory installed 1" dia. stainless steel shower curtain rod.

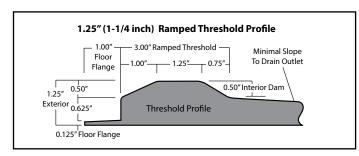

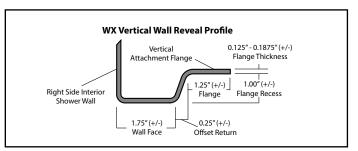





- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages) Component Packages:

- 1 ANS17 package code: 2-wall, 2-bar package (1-vertical bar) with phenolic folding RH or LH seat & shower rod, based on ANSI-2017
- 2. ADA10 package code: 2-wall, 2-bar package with phenolic folding RH or LH seat & shower rod, based on ADA-2010
- 3. 2BAR package code: 2-wall, 2-bar package (1-vertical bar) with RH or LH seat reinforcement
- 4. ICBAR package code: 2-wall, single-bar package with RH or LH seat reinforcement

Reinforced ONLY Packages:

- 5. FH-RS/LS package code: reinforcement for horizontal bars & RH or LH seat, replicating ADA package
- 6. FHV-RS/LS package code: reinforcement for a vertical bar, horizontal bars & RH or LH seat, replicating ANS package
- 7. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)