Oasis WX Configured, Ramped Threshold, Roll-In Shower Compartment With (ICC/ANSI A117.1-2017 Compliant) 2-Horizontal Bars, Vertical Bar And Folding Seat Package



Specification – Oasis one-piece FRP gelcoat shower compartment SHFW-WX-6235, having a 60 x 30-inch minimum clear interior dimension and ½-inch high maximum finished threshold with floor attachment flange on lower threshold, and expanded shower entry profile to minimize transfer space from wheelchair-to-shower seat. A factory-equipped package, in compliance with ICC/ANSI A117.1-2017 for Accessible Design, shall include a horizontal and vertical bar on the side wall opposite the seat a horizontal bar on the back wall, and a folding seat.

Standards Certification:

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bars and seat package are installed in compliance with ICC / ANSI A117.1 Standards, and certified through an independent review program.




SHFW-WX-6235 / ANS17-RS (RH seat / 3-bar & seat package)


(RH seat / 3-bar & seat package) Model & Package Illustrated






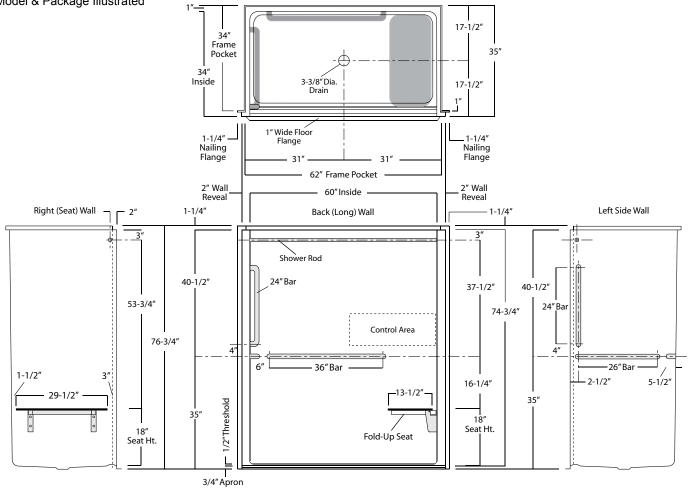

Model ID	Package Code	Description (define configuration referencing seat side)
SHFW-WX-6235 SHFW-WX-6235	/ ANS17-RS (right seat) / ANS17-LS (left seat)	60" x 30" minimum interior, center drain, wall face expanded, ramped 1/2-inch threshold shower with 1.50" dia. stainless steel 3-bar and seat package (horizontal & vertical bar opposite seat, horizontal back wall bar and folding seat).
	DELETE / SHWR ROD-SH	Delete shower curtain rod from package. (DOES NOT compromise compliance).
Option:	CRT-48/60	Site installed, white, 150 denier fabric, bottom weighted shower curtain with integrated rings.

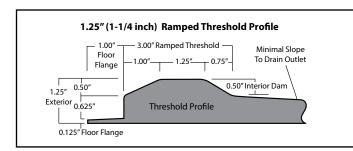


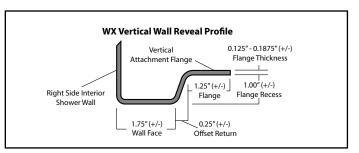









- Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)
- Photo 2: Shower Bench Seat: Factory-installed shower bench seat with non-porous, high-pressure laminate upper and lower surfaces, fused to high-density phenolic core. The seat area secures to an 18 gauge, #304 stainless steel framework, and easily pivots upward to store along the wall without supplemental fasteners. Heavy-duty wall (hinge) bracket design eliminates supplemental legs and is formed from 10 gauge, #304 brushed stainless steel. (Reinforced area includes a structural core material encapsulated in FRP composite.)
- Photo 3: Shower Curtain Rod: Factory-installed 1.00-inch diameter, concealed attachment, 18 gauge, stainless steel shower curtain rod with polished finished.
- Photo 4: Shower Curtain: White, 150 denier fabric, bottom weighted shower curtain with integrated rings.

Available Factory Installed Packages (model available without any component or reinforcement packages) Component Packages:

- ANS17 package code:
 ADA/TL package code:
- 3. ADA-RI package code: 3-wall, 3-bar package and shower rod, based on ADA-2010 & ANSI-2017
- 4. 2BAR & 3BAR package code: 2-wall, 2-bar or 3-bar packages with RH or LH seat reinforcement

Reinforced ONLY Packages:

- 5. FH package code: reinforcement for horizontal bars, based on HUD/FHA-Fair Housing
- 6. TLRF-RS/LS & TLVRF-RS/LS pkg codes: replicating "ADA" & "ANSI" component packages with single seat reinforcement
- 7. TLRF-DS package code: replicating "ADA" & "ANSI" package with dual seat reinforcement
- 8. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)