Oasis 60 x 32 ABF Configured, Flat Wall Bathtub With ActivLife 4-Bar (4-horizontal) Package (not for public accommodation)



Specification – Oasis one-piece, 60 x 32-inch deep, FRP gelcoat flat wall bathtub model TSFW-6032 ABF with an 18.25-inch apron. ActivLife package includes 2-horizontal bars on back wall along with a single horizontal bar on head end wall and on the control wall.

Standards Certification:


The bathtub listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.



NOTE: ADA & ANSI regulations limit the use of reinforced only packages to certain non-public use applications (see ADA & ANSI standards for restrictions).



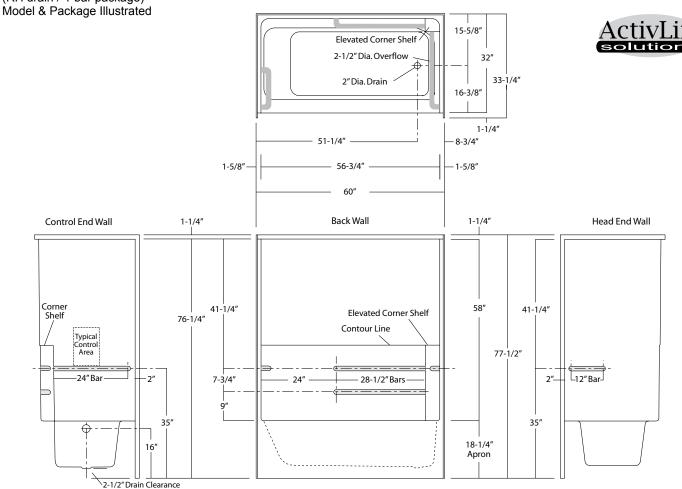

Model ID	Package Code	Description (define configuration referencing drain end)
TSFW-6032 L ABF TSFW-6032 R ABF	/ 4BAR (left drain) / 4BAR (right drain)	60" x 32", end drain, flat wall tub-shower, with 18.25" apron, and ActivLife 1.50" dia. stainless steel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).
Powder Coated Bar Packages (1.25-inch dia.)		
TSFW-6032 L ABF TSFW-6032 R ABF	/ 4BAR WHT (left drain) / 4BAR WHT (right drain)	60" x 32", end drain, flat wall tub-shower, with 18.25" apron, and ActivLife 1.25" dia. white powder coated 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).
TSFW-6032 L ABF TSFW-6032 R ABF	/ 4BAR SNK (left drain) / 4BAR SNK (right drain)	60" x 32", end drain, flat wall tub-shower, with 18.25" apron, and ActivLife 1.25" dia. nickel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).

ADD / SHWR ROD-TS Factory installed 1" dia. stainless steel shower curtain rod.

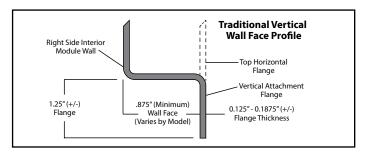






Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Available Factory Installed Packages (model available without any component or reinforcement packages) Component Packages:

1 ANS17 package code:
2. ADA10 package code:
3. 5BAR package code:
4-bar package with folding or removable RH or LH seat & shower rod, based on ADA-2010
5-bar package with folding or removable RH or LH seat & shower rod, based on ADA-2010
5-bar package replicates ANS17 bar configuration (less seat & shower rod)
4-bar package replicates ADA10 bar configuration (less seat & shower rod)
5-bar package replicates ADA10 bar configuration (less seat & shower rod)
2-wall, 2-bar or 3-bar packages

Reinforced ONLY Packages:

- 6. FH package code: reinforcement for a single vertical & horizontal bars, based on HUD/FHA-Fair Housing
- 7. 3SM & 3SF package codes: expanded reinforcement packages, (with or without package components)